
CONTEMPO I

LX3660

59.75" x35.75" x20.75"



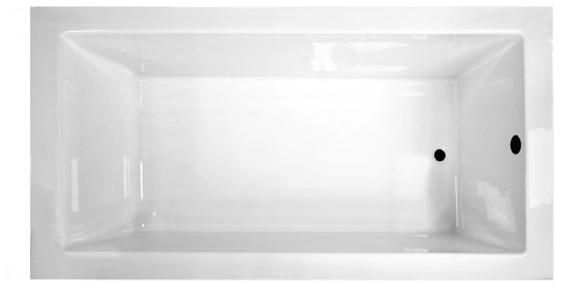

		59.75"
GENERAL SPECIFICATIONS:		
Tub Size	59.75" x35.75" x20.75"	
Bathing Well:	Length: 53" top / 44" bottom Width: 28" top / 23" bottom Depth at overflow: 15"	35.75" <u>3.75"</u> <u>2.75"</u> <u>2.75"</u> <u>2.75"</u>
Average Fill:	30 gal to account for body	53"
Maximum Fill:	55 gal to overflow	
Electrical Requirement:	1-20 amp/115 GFCI outlet	
All LX tubs are manufactured with 0.125" 100% acrylic, the thickest in the industry: Pre-leveled and framed to make installation quicker and easier. Tubs are freestanding and require no additional framing or costly installation labor. Bathtub bases are made with a solid wood base and structural foam that provides support, reduces noise, and insulates.		
LX SKU KEY: *Please specify left or right hand drain and motor placement		
	blor: White Biscuit Bone LHD - Left Hand Drain Soaker Whilrpool Air RHD-Right Hand Drain	Frame Reinforcement legs Solid Wood Base Stabalizing Foam Suggested Pump Location
	LHM - Left Hand Motor	

INSTALLATION: Height measurement is inclusive of wood and foam framing. All measurements are +/- 1/2" and are subject to change without notice. Drawing shows recommended pump location as well as approximate location of frame reinforcement legs. Please measure tub before building deck. Data herein supercedes all previous data prior to date shown below.



www.TUBZZ.com